







Product Description


Solar hybrid charging lantern. It is composed of the latest generation technology components of lithium batteries, electronics and solar panel. Remove all the non-essential elements from the vintage lantern to leave a simple and clean architectural structure. The purpose is filled up with the space that surrounds it without making a mark and without changing the visual continuity of the space in the day. Its transparency and lightweight structure create intimate, suffused atmospheres which leave the fascination of the night unchanged. The structure is made of die-casting aluminium and extrusion aluminium profile with a matt black, matt white, dark grey and corten finish. Its materials, all recyclable, have been carefully selected. Adjustments are also easy. 1 twilight sensor button and 1 manual control button located next to the solar panel.



360° light distribution



184mm



184mm



300mm

Technical Information

| |
|--|
| Light source: SMD LED Module |
| Colour temperature: 2700K & 3000K (switchable) |
| Colour rendering index: CRI > 80 |
| Luminaire connected wattage: 2.2 W |
| Voltage: DC3.7V |
| Luminaire luminous flux: 150 lm |
| Light optics: 360° |
| Light distribution: Wide |
| Battery type: 18650 Li-ion battery |
| Battery capacity: 2200mAh×2 |
| Solar charging time: <20hrs |
| USB charging time: <6hrs |
| Battery life: >20hrs (50% light intensity) |
| Battery life: >9hrs (100% light intensity) |
| Adapter(optional): CLASS II; Input AC100-240V; Output DC5V 1A; |
| USB Type C cable incl-: 1.5m USB cable |
| Manual switch: Button ON/OFF |
| Sensor switch: Button ON/OFF |
| Dimmer switch: Button stepless dimmable 5%-100% |
| Memory function: Memory of brightness & colour temperature |
| Wall mount bracket: Optional |
| Protection class: IP65 |
| Impact strength: IK 06 |
| Safety: Class III |
| Weight: 1.59kg |

Finish Available


| | |
|------------|---|
| Matt Black | ■ |
| Matt White | ■ |
| Corten | ■ |

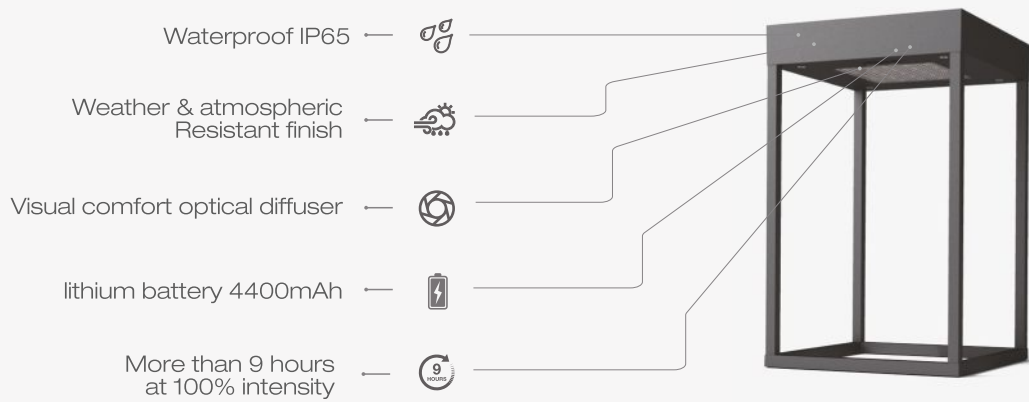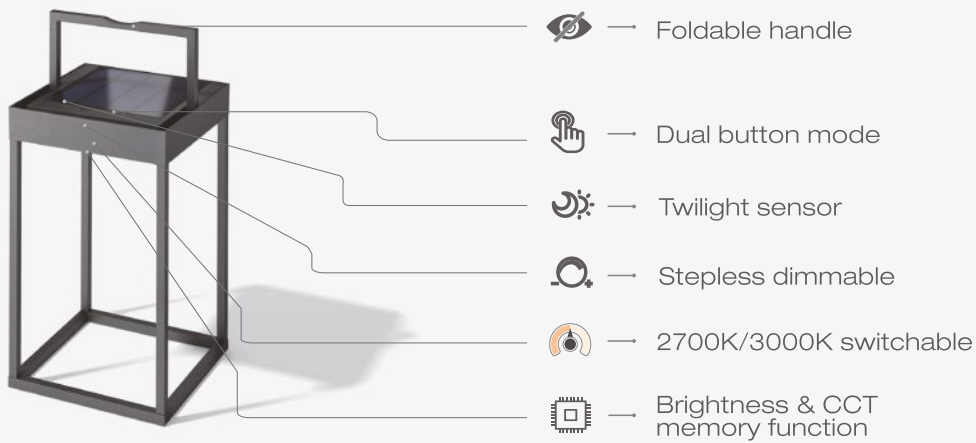



WALL-MOUNTED
BRACKET (OPTIONAL)



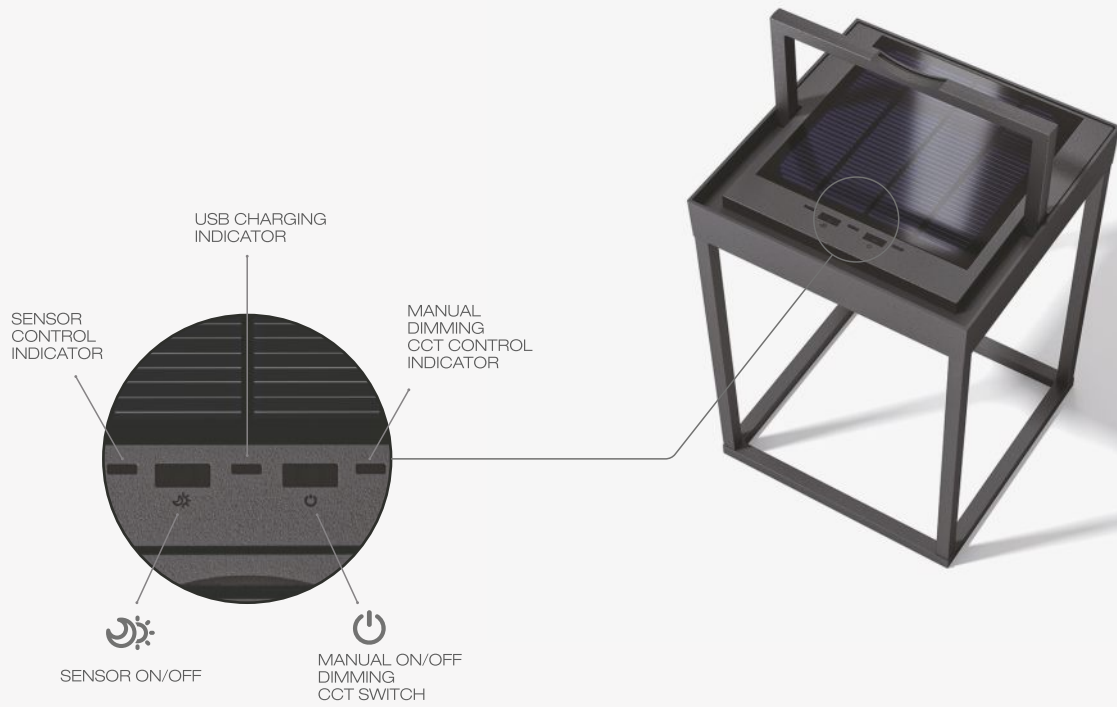


SENSOR MODE
AUTO ON



SENSOR MODE
AUTO OFF



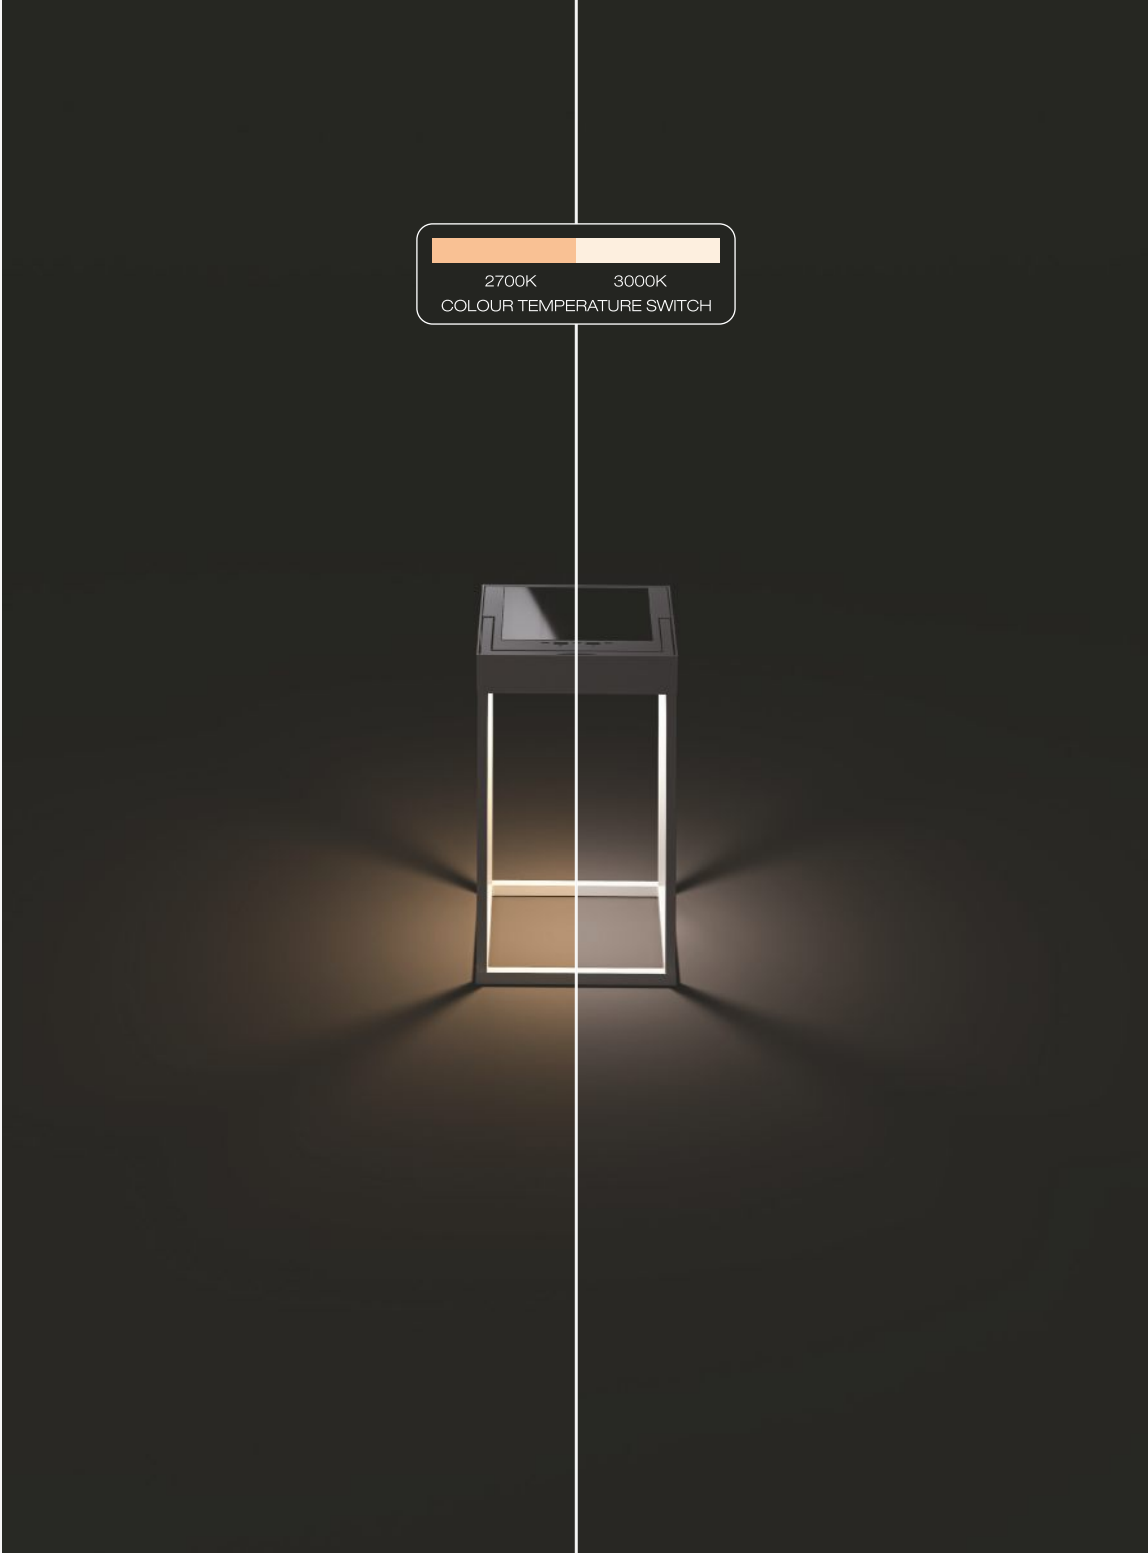



Accessories



Description:


Wall mount bracket

Black Item No. 806-008

White Item No. 806-807

Corten Item No. 806-809

Size W 15 x D 18 - Wall plate 7 x 7 cm



Profile picture

Description: USB Adapter,
CLASS II, Input AC100-240V,
Output DC5V 1A

White Item No. 806-200